


# Audioflex® soft foam


**Description:** Elastic soft foam based on polyurethane, with a high-quality look and feel. Its technical properties are ideal for noise reduction, whereby the material creates a good balance between sound absorption and insulation. Self-adhesive design and various laminations possible.

**Application:** Sound absorption and insulation for heat pumps, ventilation and air conditioning technology, etc.

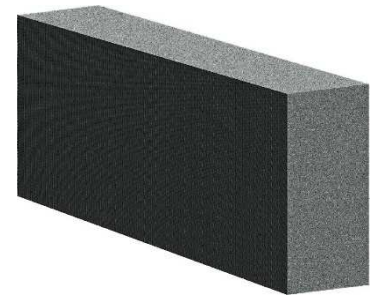

## Technical specification

Thickness	>8	mm
Dimensions	max. 2000 x 1000	mm
Density	30	kg/m <sup>3</sup>
Fire class (DIN 4102)	B2	
Temperature resistance	-30 bis 100	°C
Tensile strenght	110	kPa
Elongation	130	%
Copmression hardness	03.Jän	kPa
Thermal conductivity	~ 0,038	W/mK

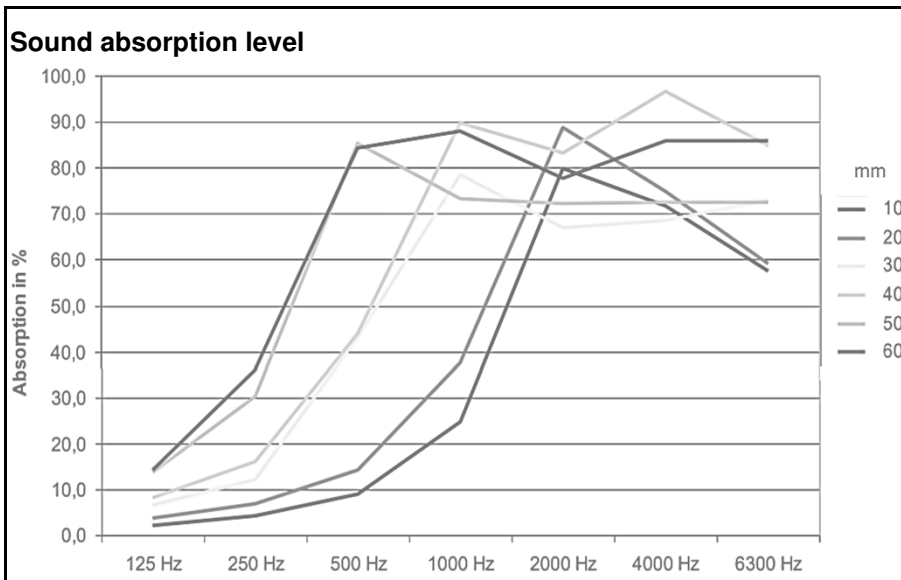

Die Angaben stützen sich auf den heutigen Stand der Kenntnisse und Erfahrungen zum Zeitpunkt der Erstellung. Sofern nicht ausdrücklich vereinbart, stellen sie jedoch keine Zusicherung im Rechtssinne dar.

08.06.2020